


XSOL-X provides more foot side 3D data than USOL
 Portable and reliable. Fast true 3D laser scan with color texture
 Auto landmark, arch index, measurement, and diagnostic report
 Custom shoes and orthotic insoles for foot clinics and retail stores

XSOL-X is Smaller/Lighter/Portable/Faster than USOL-X.



XSOL-X vs USOL-X

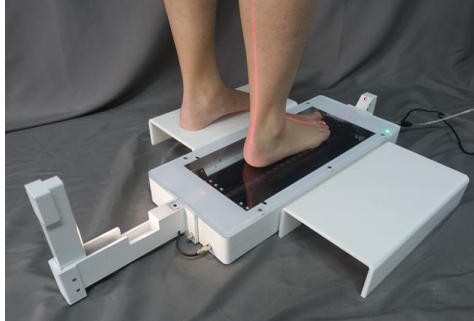

XSOL-X Floor







XSOL-X Floor



XSOL-X Vertical

XSOL software improves on USOL software (Same file formats).

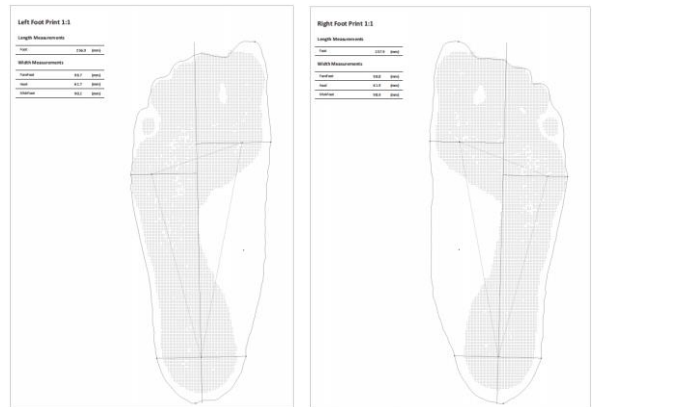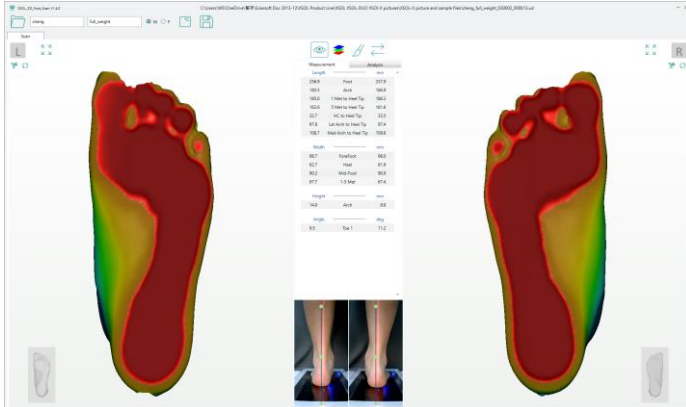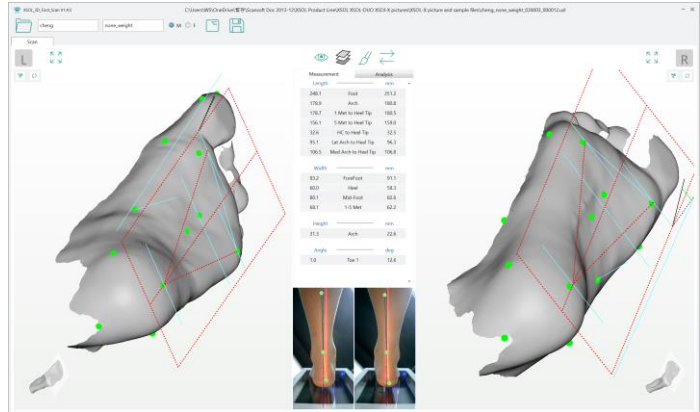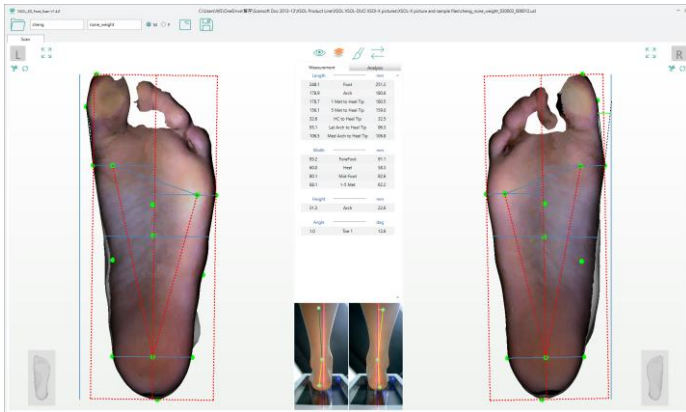



cheng full_weight

Shop name

Scan date: 2023/03/20 14:57:53

Scanner No: 030003_000016

Age

Gender: Male

Snapshot

	Left	Right
Foot Length (mm)	255.6	256.7
Foot Width (mm)	99.6	97.8
Shoe Size (EU)	41	41
Arch Index	0.24	0.24




More

Heel Angle (deg)

Left: 9 Eve
Right: 7 Eve

Normal | Mild | Moderate | Severe

Leg Angle (deg)

Left: 5 Inv
Right: 7 Inv


Normal | Mild | Moderate | Severe

Hallux Angle (deg)

Left: 3.1
Right: 12.7

Normal | Mild | Moderate | Severe

Heel Angle & Leg Angle



L R

Hallux Angle



R L

XSOL-X Hardware

- Foot Plantar 3D with color in non/semi/full weight
XSOL-X can't scan foam impression box. XSOL can.
- Laser 3D Scan 4.3s/5.9s one-way
Color texture 4.3s/5.9s return trip
- PC Minimum J4125 4G RAM 1080P display
PC Recommended N5105 8G RAM or better
- Software UI or Foot switch to activate scan
- Room lighting (improved noise filtering than USOL-X)
- Heel camera has higher resolution than USOL-X
- Clean 3D mesh, +/- 1.0mm accuracy
- Scan Volume 350L X 170W X 80H mm
- Size: 528L X 230W X 69H mm
- Weight: 4.5Kg (9.9Lb)
- Load Capacity: 180 Kg (397Lb)
- Power adapter AC 100-240V; DC 12V/3A
- Customizable panels design and color
- CE/FDA/PSE certification/registration
- One-year limited warranty


XSOL Software

- Win10/11, doesn't support Win7/8
- Auto diagnostic for arch type, bunion, and heel angle
- Auto tracking blue-marked 1st and 5th met points
- Auto tracking blue-marked 3 heel points.
- Mark landmarks on foot then drag points to match
- PDF Foot report with manual annotations
- User-editable report templates, sell your own brand
- User-define UI and icon color
- Default English. Translate into your own local language
- Shoe size US/UK/EU/CN/JP standards
- Export to **STL/WRL/OBJ/PLY**, JPG/PNG, PDF report, CSV data files
- FTP send order to shoe/insole fabrication
- User-define RX form for orthopedic shoe/insole
- Developers: CMD/TCP call scanner to receive data-integration into your own CAD software and database
- Optional encrypt scanners to lock files
- Also support **USOL, USOL-DUO and USOL-X** scanners

XSOL-X Standard: Scanner, Power Adapter, USB Cable (White), Foot Switch, Foldable Heel Camera (with laser)

XSOL-X Floor: **XSOL-X Standard plus** Toe Laser, Side Steps (Pair)

Optional: Heel Laser Module (No Camera)

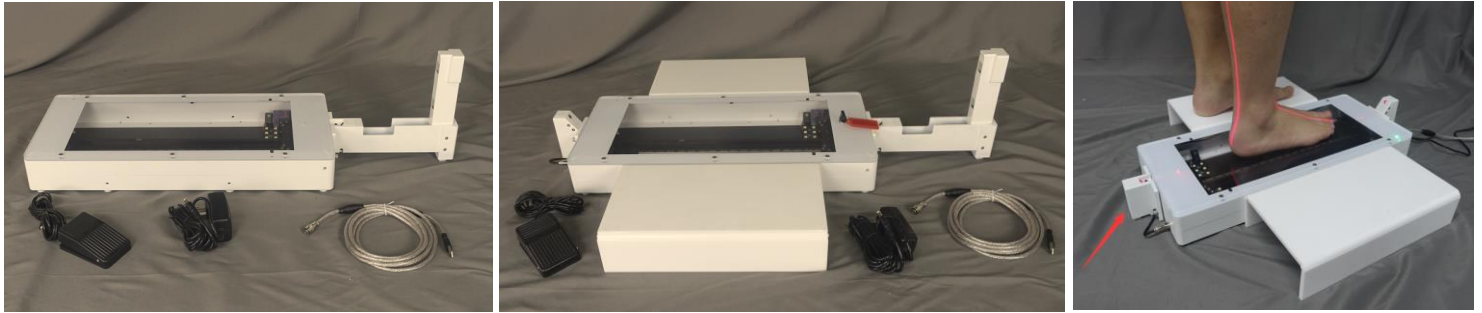

XSOL-X Vertical: **XSOL-X Standard plus** Toe Laser, Pedestal (with wheels) and VESA Conversion Bracket.

Pedestal needs assemble to reduce shipping size. Weight is 5KG. Support mounting position for supine or prone scans.

Height adjustable 500-1200mm. Heel Camera records heel position. Heel and Toe laser help to control foot posture

