XSOL 3D Laser Foot Plantar Scanner   2025.02.11
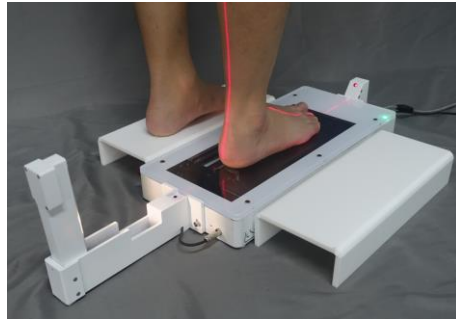
Portable and reliable. Fast true 3D laser scan with color texture
Auto landmark, arch index, measurement, and analysis report
Custom shoes and orthotic insoles for foot clinics and retail stores

www.scanpod3d.com

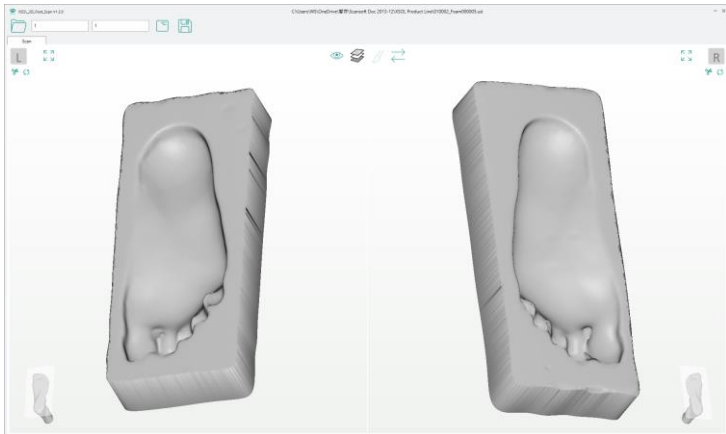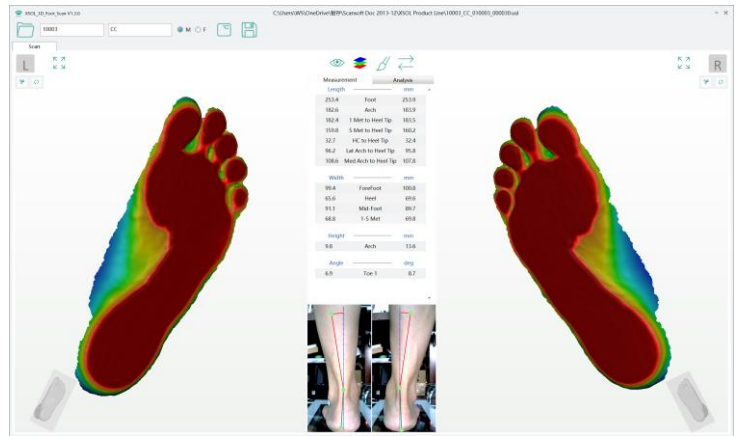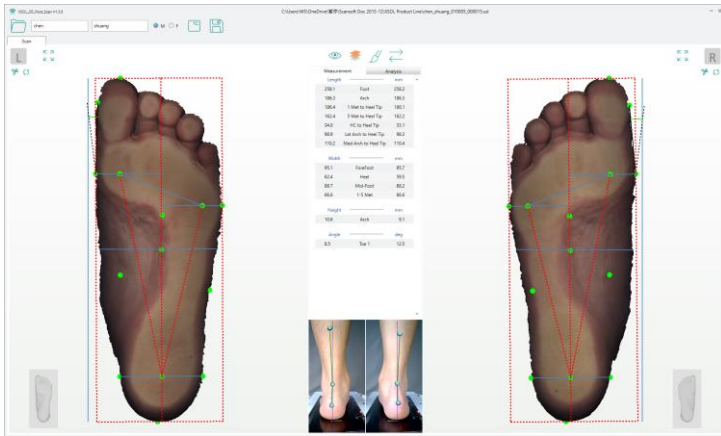## XSOL is Smaller/Lighter/Portable/Faster than USOL

USOL vs XSOL

XSOL Floor

XSOL Floor

XSOL Vertical

XSOL software improves on USOL software (Same file formats)

ScanPod3D

chen zhuang

Shop name		
Scan date	2022/09/26 09:33:37	
Scanner No	010005_000015	
Age		
Gender	Male	

Snapshot

	Left	Right
Foot Length (mm)	258.1	258.2
Foot Width (mm)	95.1	95.7
Shoe Size(EU)	41	41
Arch Index	0.25	0.25

Low+++   ++   +   Normal   High

More

	Left	Right
Heel Angle (deg)	3 Eve	2 Eve

Normal   Mild   Moderate   Severe

	Left	Right
Leg Angle (deg)	2 Inv	3 Inv

Normal   Mild   Moderate   Severe

	Left	Right
Hallux Angle (deg)	8.5	12.5

Normal   Mild   Moderate   Severe

Heel Angle &Leg Angle

Hallux Angle

XSOL Hardware

- Foot Plantar 3D with color in non/semi/full weight
- Foam Impression and Plaster Cast
- Laser 3D Scan 2.0s one-way
  Color texture 2.0s/4.9s for normal/high resolution
  High resolution color can match 2D office scanner
- PC Minimum CPU N100 8G RAM 1080P display
  PC Recommended N5105 8G RAM or better
- Software UI or Foot switch to activate scan
- Room lighting (improved noise filtering than USOL)
- Heel camera has higher resolution than USOL
- Clean 3D mesh, +/- 1.0mm accuracy
- Scan Volume 330L X 140W X 80H mm
- Size: 455L X 212W X 55H mm
- Weight: 3.2Kg (7.1Lb)
- Load Capacity: 180 Kg (397Lb)
- Power adapter AC 100-240V; DC 12V/3A
- Customizable panels design and color
- CE/FDA/PSE certification/registration
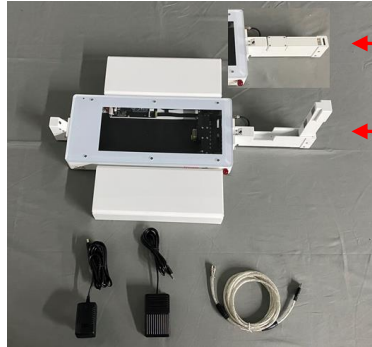- One-year limited warranty

XSOL Software

- Win10/11, doesn't support Win7/8
- Auto analysis for arch type, bunion, and heel angle
- Auto tracking blue marker at 1st and 5th met points
- Auto tracking blue marker at 3 heel points
- Mark landmarks on foot then drag points to match
- PDF foot report with manual annotations
- User-editable report templates, sell your own brand
- User-define UI and icon color
- Default English. Translate into your own local language
- Shoe size US/UK/EU/CN/JP standards
- Export to STL/WRL/OBJ/PLY, JPG/PNG, PDF report, CSV data files
- FTP send order to shoe/insole fabrication
- User-define RX form for orthopedic shoe/insole
- Developers: CMD/TCP call scanner to receive data-
  -integration into your own CAD software and database
- Optional encrypt scanners to lock files
- Also support USOL, USOL-DUO and USOL-X scanners

XSOL Standard: Scanner, Power Adapter, USB Cable (Clear), Foot Switch, Foldable Heel Camera (with laser)

XSOL Floor: XSOL Standard plus Toe Laser, Side Steps (Pair)
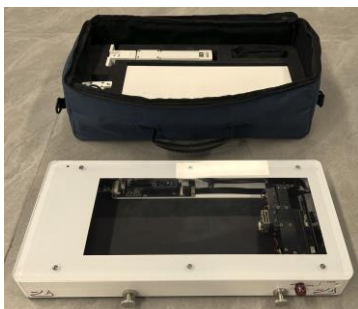

XSOL Standard   XSOL Floor

XSOL Vertical: XSOL Standard plus Toe Laser, Pedestal (with wheels) and VESA Conversion Bracket.

Pedestal needs assemble to reduce shipping size. Weight is 5KG. Support mounting position for supine or prone scans.
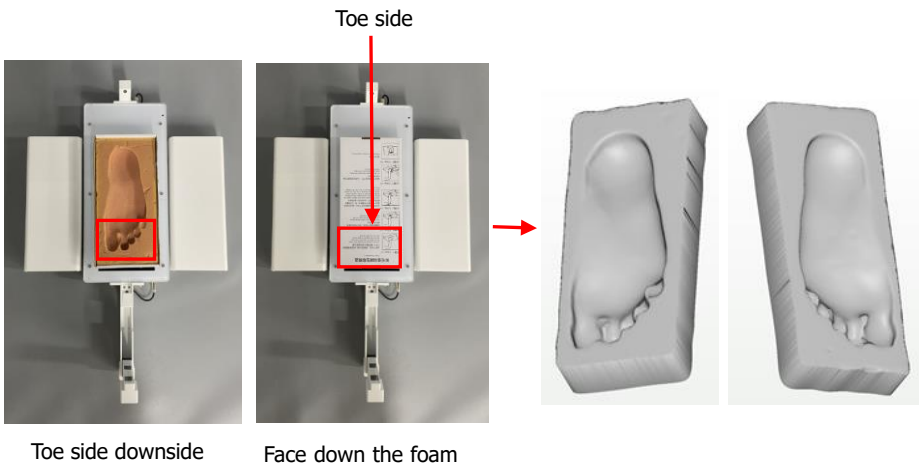
Height adjustable 500-1200mm. Heel Camera records heel position. Heel and Toe laser help to control foot posture

Optional Carrying Case: can fit the entire XSOL Standard, XSOL Floor, or XSOL Vertical (without the pedestal) inside.

Foam Scan:

Toe side

Toe side downside

Face down the foam

Auto Tracking Blue Marker: